

Product Highlights

Enjoy High-Performance Wireless Connectivity

Harness the power of IEEE 802.11ac Wave 2 wireless and experience wireless speeds up to 1300 Mbps¹, perfect for high-demand business applications

Strong Security and Authentication Features

Maintain a highly secure network with a range of features including WPA/WPA2, wireless LAN segmentation, and VLAN support

Flexible Operation

Configure to use as an access point, a Wireless Distribution System (WDS), a WDS with access point, or a wireless client



DAP-2610

Wireless AC1300 Wave 2 Dual-Band PoE Access Point

Features

High-Performance Connectivity

- IEEE 802.11ac Wave 2 wireless¹
- Up to 1300 Mbps¹ speed
- Gigabit LAN port

Extensive Management

- Web, SSL, SSH and Telnet management
- SNMP v1, v2c, v3
- D-Link Central Wi-Fi Manager support for additional configuration options
- AP Array utility support

Trusted Security Features

- WPA/WPA2 Personal/Enterprise
- 64/128-bit WEP
- MAC filter and WLAN partitioning
- Local/POP3/RADIUS/PassCode/LDAP authentication for captive portal

Convenient Installation

- Small form factor design for easy placement
- Supports 802.3af Power over Ethernet (PoE) for flexible installation options
- Wall and ceiling mountable²
- Includes mounting clips for attaching to suspended-ceiling T-rails

Overview

The DAP-2610 Wireless AC1300 Wave 2 Dual-Band PoE Access Point is designed to support small/medium business or enterprise environments by providing network administrators with secure and manageable dual-band wireless LAN options, and utilizing the cutting-edge speed of Wireless AC.

Blazing Wireless Wave 2 AC Performance

The DAP-2610 delivers reliable, high-speed wireless performance using the latest 802.11ac Wave 2 standard with maximum wireless signal rates of up to 400 Mbps (256-QAM) over the 2.4 GHz band, and 900 Mbps over the 5 GHz band¹. This, coupled with support for the Wi-Fi Multimedia™ (WMM) Quality of Service (QoS) feature, makes it an ideal access point for audio, video, and voice applications. When enabled, QoS allows the DAP-2610 to automatically prioritize network traffic according to the level of interactive streaming, such as HD movies or VoIP. The QoS feature can be adjusted through the DAP-2610 web GUI using a drop-down menu to select customized priority rules. Additionally, the DAP-2610 supports load balancing to ensure maximum performance by limiting the maximum number of users per access point.

Versatile Access Point Functionality

The DAP-2610 allows network administrators to deploy a highly manageable and extremely robust simultaneous dual-band wireless network. The DAP-2610 can provide optimal wireless coverage over the 2.4 GHz (802.11b, 802.11g, and 802.11n) and the 5 GHz (802.11a, 802.11n, and 802.11ac) bands.

Easy to Install

The DAP-2610 ships with a low profile mounting bracket, enabling easy installation on any wall or ceiling. It also includes adapter clips for attaching

Wireless AC1300 Wave 2 Dual-Band PoE Access Point

to suspended ceiling T-rails. This high-speed access point can be AC powered using the (included) AC/DC adapter, or for advanced installations, it has integrated 802.3af Power over Ethernet (PoE) support, allowing installation in areas where power outlets are not readily accessible.

Security

To help maintain a secure wireless network, the DAP-2610 supports both Personal and Enterprise versions of WPA and WPA2 (802.11i), with support for RADIUS server backend and a built-in internal RADIUS server allowing users to create their accounts within the device itself. This access point also includes MAC address filtering, wireless LAN segmentation, SSID broadcast disable, rogue AP detection, and wireless broadcast scheduling for further protection of the wireless network. The DAP-2610 includes support for up to eight VLANs per band, allowing multiple SSIDs to be implemented and further segment users on the network. It also includes a wireless client isolation mechanism, which limits direct client-to-client communication.

Additionally, the DAP-2610 supports Network Access Protection (NAP), a feature of Windows Server® 2008, allowing network administrators to define multiple levels of network access based on individual client's needs.

Multiple Operation Modes

To maximize total return on investment, the DAP-2610 can be configured to optimize network performance based on any one of its multiple operation modes: Access Point, Wireless Distribution System (WDS), a WDS with Access Point, and Wireless Client. With WDS support,

network administrators can set up multiple DAP-2610s throughout a facility and configure them to bridge with one another, while also providing network access to individual clients. The DAP-2610 also features advanced features such as load balancing and redundancy, for fail-safe wireless connectivity.

Network Management

Network administrators have multiple options for managing the DAP-2610, including Web (HTTP), Secure Socket Layer (SSL), Secure Shell (SSH), and Telnet. For advanced network management, administrators can use the D-Link Central Wi-Fi Manager controller software to configure and manage multiple access points from a single location. In addition, the D-Link Central Wi-Fi Manager provides network administrators with the means of conducting regular maintenance checks remotely, eliminating the need for sending out personnel to physically verify proper operation. The DAP-2610 also has a wireless scheduling feature, turning off wireless functionality when it is not needed to save power.

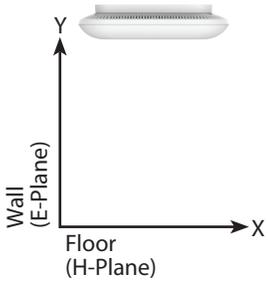
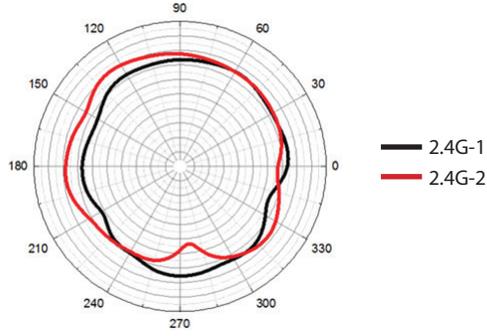
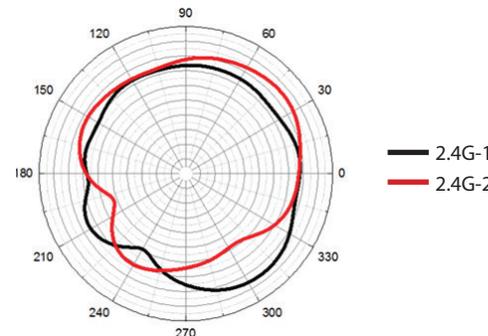
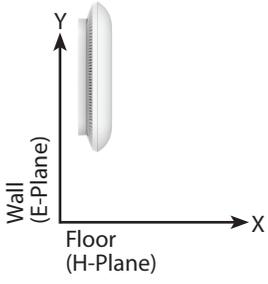
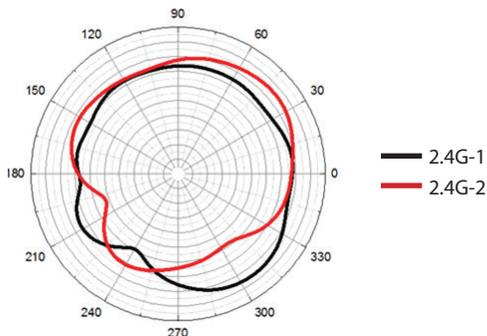
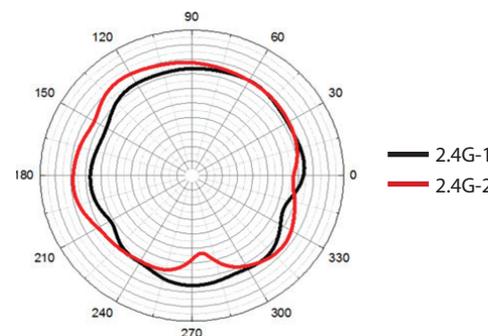
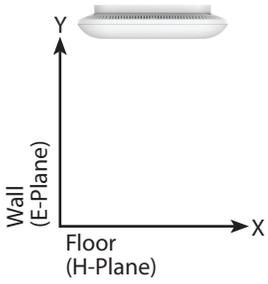
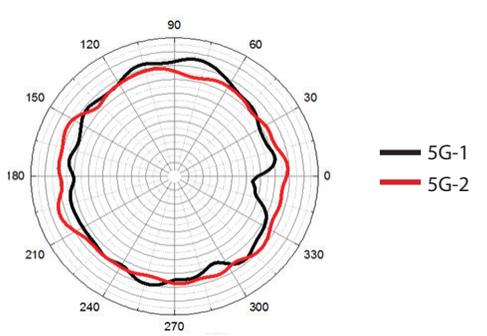
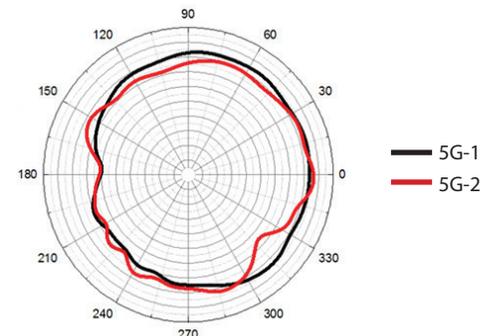
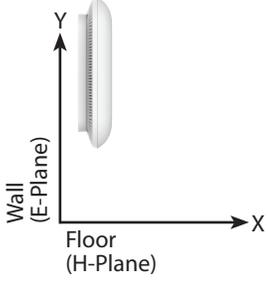
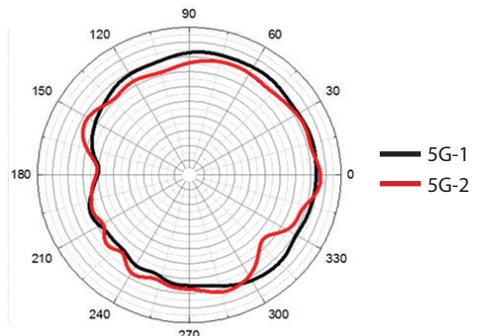
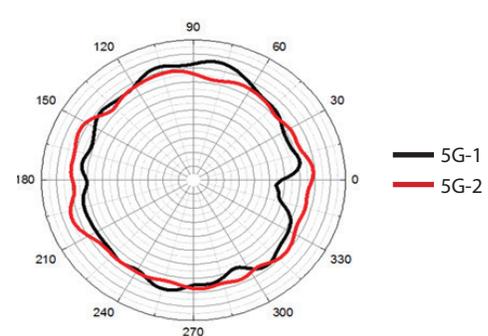
With simultaneous dual-band functionality, PoE support, extensive manageability, versatile operation modes, and solid security enhancements, the DAP-2610 provides small/medium business and enterprise environments with a business-class solution for wireless networking.

Limited Lifetime Warranty

D-Link offers a Limited Lifetime Warranty on the DAP-2610 Wireless AC1300 Wave 2 Dual-Band PoE Access Point to further its commitment to product quality and long-term customer confidence.⁴



Technical Specifications		
	DAP-2610	
		
General		
Device Interfaces	(1) IEEE 802.11a/b/g/n/ac Wave 2 wireless ¹	(1) Gigabit LAN (supports PoE)
Standards	IEEE 802.11a/b/g/n/ac ¹ IEEE 802.3u/ab	IEEE 802.3az Energy Efficient Ethernet (EEE) IEEE 802.3af Power over Ethernet
Antennas	2 internal dual-band 3 dBi omni antennas	
Operating Frequency ³	2.4 GHz band: 2.4 to 2.4835 GHz	5 GHz band: 5.15 to 5.35 GHz, 5.47 to 5.85 GHz
Maximum Output Power	23 dBm for 2.4 GHz	23 dBm for 5 GHz
Data Signal Rate	2.4 GHz • Up to 400 Mbps ¹	5 GHz • Up to 867 Mbps ¹
Functionality		
Security	WPA-Personal WPA-Enterprise WPA2-Personal WPA2-Enterprise WEP 64/128-bit encryption	SSID broadcast disable MAC address access control Network Access Protection (NAP) Internal RADIUS server
Network Management	Telnet Secure Telnet (SSH) Web (HTTP) Secure Socket Layer (SSL)	Traffic control SNMP v1/v2c/v3 D-Link Central Wi-Fi Manager AP Array
LEDs	Power/status	
Physical		
Dimensions	6.69 x 6.69 x 1.1 inches (170 x 170 x 28 mm)	
Weight	0.69 lbs (314 g) without mounting base	0.82 lbs (370.6 g) with mounting base
Power Supply	External power adapter: 12V / 1A	IEEE 802.3af PoE
Maximum Power Consumption	12 W	
Temperature	Operating: 32°F to 104°F (0°C to 40°C)	Storage: -4°F to 149°F (-20°C to 65°C)
Humidity	Operating: 10% to 90% non-condensing	Storage: 5% to 95% non-condensing
Meantime Between Failure (MTBF)	> 30,000 hours	
Certifications	FCC IC CE	UL Wi-Fi® Certified

Antenna Patterns		
Orientation	H-Plane	E-Plane
<p>2.4 GHz Ceiling Mounted</p> 		
<p>2.4 GHz Wall Mounted</p> 		
<p>5 GHz Ceiling Mounted</p> 		
<p>5 GHz Wall Mounted</p> 		

Wireless AC1300 Wave 2 Dual-Band PoE Access Point



What's in the Box:

- DAP-2610 Wireless AC1300 Access Point
- Mounting base and hardware
- 3 pairs of mounting clips for suspended-ceiling T-rails (7/16", 15/16", 1 1/2")
- Ethernet cable
- AC-DC power adapter
- User documentation

Ordering Information

Product	Description	Warranty
DAP-2610	Wireless AC1300 Wave 2 Dual-Band PoE Access Point	Limited Lifetime ¹

¹ Maximum wireless signal rate derived from IEEE standard 802.11 and 802.11ac specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental factors will adversely affect wireless signal range.

² This unit is designed for indoor environments, you might violate local regulatory requirements by deploying this unit in outdoor environments.

³ Operating frequency ranges vary depending on the regulations of individual countries and jurisdictions. The DAP-2610 may not support the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz frequency ranges in certain regions.

⁴ Limited Lifetime Warranty available in U.S.A. only. Warranty void when not purchased from Authorized US D-Link Reseller. Please visit us.dlink.com for list of Authorized US Resellers.

Updated 07-Aug-2017

Hardware Rev A

DAP-2610_REVA_DATASHEET_1.00_EN_US.PDF

For more information

U.S.A. | 17595 Mt. Herrmann Street | Fountain Valley, CA 92708 | 800.326.1688 | us.dlink.com

©2017 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link and the D-Link logo are registered trademarks of D-Link Corporation or its subsidiaries in the United States and/or other countries. Other trademarks or registered trademarks are the property of their respective owners.

All references to speed are for comparison purposes only. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

Visit us.dlink.com for more details.

D-Link[®]
Building Networks for People